



CERAMIC FILTER

LTC/LTD450 LTC/LT SMDseries.

Configuration



Dimension

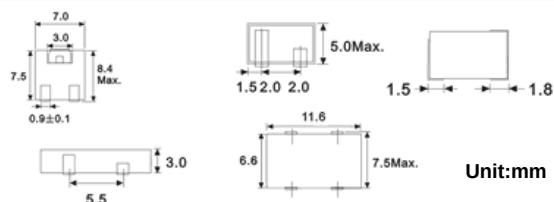

Unit:mm

Technical Characteristics

Part Number		Center Frequency(KHz)		Insertion Loss (dB)max.	Pass Band Ripple (dB)max	6dB Band Width	Alt.Band Width (KHz)max	Stop Band attenuation to ±100KHz (dB)min	Input/output Impedance
□□□ 455E	□□□ 450E	455±1.5	450±1.5	6	2	±3.5	±9.0	40	2000
□□□ 455D	□□□ 450D	455±1.5	450±1.5	6	2	±4.5	±10.0	35	2000
□□□ 455F	□□□ 450F	455±1.0	450±1.0	6	2	±6.0	±7.5	40	2000
□□□ 455H	□□□ 450H	455±1.0	450±1.0	6	2	±3.0	±10.0	60	2000
□□□ 455G	□□□ 450G	455±1.0	450±1.0	6	2	±4.5	±9.0	35	2000

