


Quartz Crystal Series

3225B

Features

- ◆ RoHS Compliant
- ◆ Ceramic/metal package

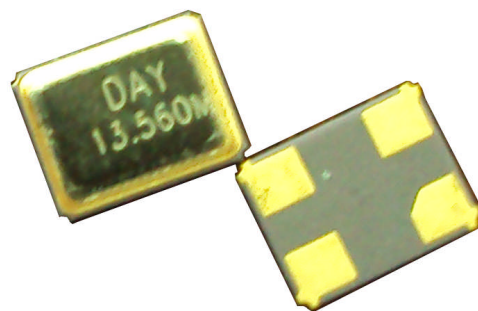

Electrical Specifications

Item	Specifications	Remarks
Nominal Frequency Range	9.800MHz to 66.000MHz	Fund.; AT-Cut
	40.000MHz to 150.000MHz	3 rd O.T.;AT-Cut
Frequency Tolerance	±10ppm(Standard) at 25℃±3℃	Others are offered
Load Capacitance	Fund.: 7pF to 20pF	Please specify
Series Resistance	As ESR table	
Shunt Capacitance	5pF Max	
Drive Level	100μW Max	
Operating Temperature	-20℃ to +70℃(Standard)	Others are offered
Storage Temperature	-55℃ to +150℃	
Stability vs. Temperature	±10ppm(Standard)	Others are offered
Insulated Resistance	500MΩ	Minimum
Aging	±2ppm/year	Maximum

ESR(Series Resistance)

Frequency(MHz)	Mode	Ohm Max	Frequency(MHz)	Mode	Ohm Max
9.800~11.999	Fund.;AT	200	30.000~66.000	Fund.;AT	40
12.000~19.999	Fund.;AT	80	40.000~100.000	3 rd O.T.;AT	120
20.0001~29.999	Fund.;AT	60	100.001~150.000	3 rd O.T.;AT	90

Stability vs. Temperature

◆ Standard		1	2	3	5	6	7	Remarks
◇ Please specify		±10ppm	±20ppm	±30ppm	±50ppm	±100ppm	±150ppm	
B	-10℃ to +60℃	◇				◇		
C	-20℃ to +70℃	◆	◇	◇	◇	◇	◇	Standard
D	-40℃ to +85℃		◇	◆	◇	◇	◇	
E	-45℃ to +125℃			◇	◆	◇	◇	

Ordering Information

Q	R	Type	Pin	XX.XXXX	M	Mode	CL pF	Freq.Tolerance at 25℃	Operating Temp.	Stability Vs. Temp.	Option
---	---	------	-----	---------	---	------	-------	-----------------------	-----------------	---------------------	--------

Q:Quartz 32: 3.2*2.5mm B:4 Center frequency 9.8 to 150.0MHz M: MHz F:Fund.;AT See Table ±10ppm to ±150ppm See Table See Table F:Lead Free Blank:T&R
R:Resonator

Example:QR32B16.0000MFT1C1F

(Crystal,SMD3.2*2.5mm,16.0000MHz,4pins,Fund:AT,12pF, ±10ppm,-20 to +70deg, ±10ppm.T&R,Lead free)


Quartz Crystal Series

3225B

Load Capacitance Codes


7pF:	E	8pF:	F	9pF:	B	10pF:	R
12pF:	T	15pF:	H	16pF:	I	18pF:	J
20pF:	K	22pF:	L	25pF:	G	27pF:	M
30pF:	N	32pF:	P	33pF:	W	Series:	S

Dimensions

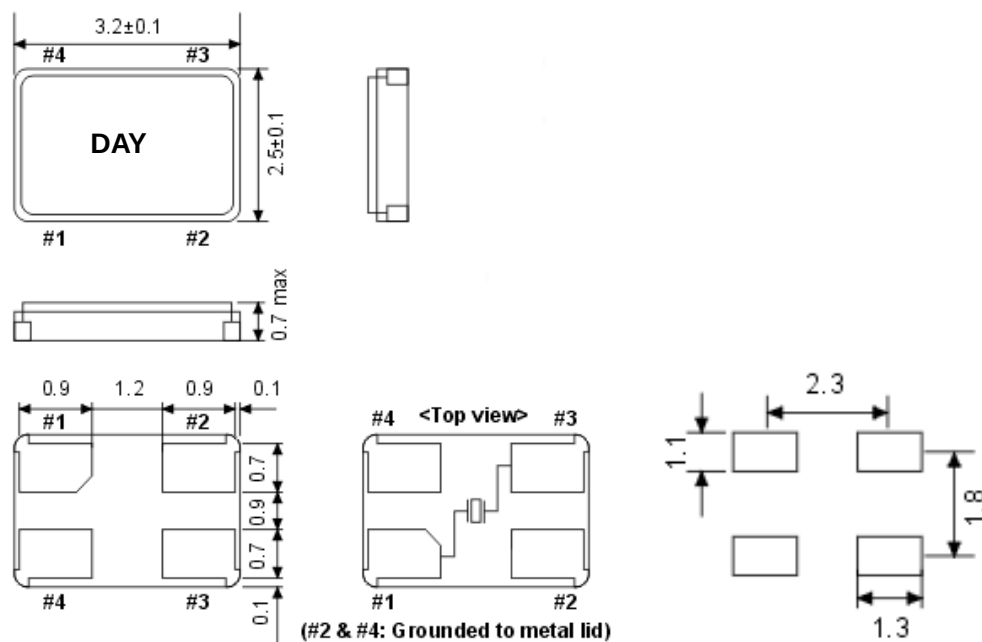

Unit:mm

Taping Specification

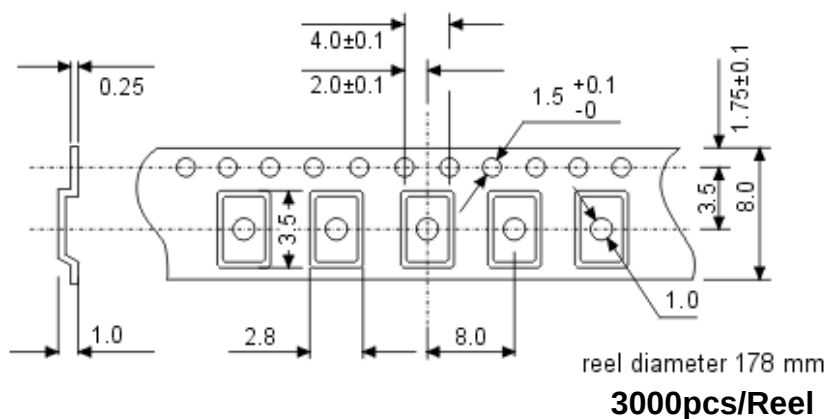

Reflow Soldering Profile

