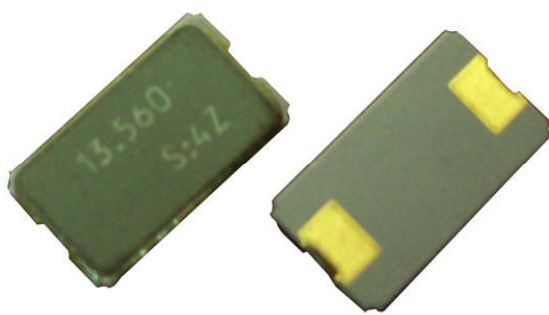


Quartz Crystal Series	
8045A	Features ◆ RoHS Compliant ◆ Ceramic/metal package 

Electrical Specifications

Item	Specifications	Remarks
Nominal Frequency Range	4.000MHz to 48.000MHz	Fund.; AT-Cut
	30.000MHz to 125.000MHz	3 rd O.T.;AT-Cut
Frequency Tolerance	±20ppm(Standard) at 25°C±3°C	Others are offered
Load Capacitance	Fund.:10pF to ∞,O.T.:5pF to ∞	Please specify
Series Resistance	As ESR table	
Shunt Capacitance	7pF Max	
Drive Level	10μW to 100μW	1000μW Max
Operating Temperature	-20°C to +70°C (Standard)	Others are offered
Storage Temperature	-55°C to +125°C / -65°C to +185°C	
Stability vs. Temperature	±20ppm(Standard)	Others are offered
Insulated Resistance	500MΩ	Minimum
Aging	±2ppm/year	Maximum

ESR(Series Resistance)

Frequency(MHz)	Mode	Ohm Max	Frequency(MHz)	Mode	Ohm Max
4.0~15.9	Fund.;AT	80	30.0~79.9	3 rd O.T.;AT	80
16.0~48.0	Fund.;AT	40	80.0~125.0	3 rd O.T.;AT	60

Stability vs. Temperature

◆ Standard		1	2	3	5	6	8	Remarks
◇ Please specify		±10ppm	±20ppm	±30ppm	±50ppm	±15ppm	±100ppm	
B	-10°C to +60°C	◇				◇		
C	-20°C to +70°C	◇	◆	◇	◇	◇	◇	Standard
D	-40°C to +85°C		◇	◇	◆	◇	◇	
E	-50°C to +150°C				◇	◇	◆	

Ordering Information

Q	R	Type	Pin	XX.XXXX	M	Mode	CL pF	Freq.Tolerance at 25°C	Operating Temp.	Stability Vs.Temp.	Option
---	---	------	-----	---------	---	------	----------	---------------------------	--------------------	-----------------------	--------

Q: Quartz 84: A: 2 Center frequency M: F: Fund.;AT See ±10ppm to See Table See Table F: Lead Free
R: Resonator 8.0*4.5mm 4.0 to 125.0MHz MHz O: 3rd O.T.;AT Table ±100ppm Blank: T&R

Example: QR84A13.5600MFT1C1F

(Crystal, SMD 8.0*4.5mm, 13.5600MHz, 4pins, 12pF, +/-10ppm, -20 to +70deg, +/-10ppm. T&R, Lead free)

Quartz Crystal Series

8045A

Reflow Soldering Profile

