

Crystal Oscillator Series	Oven Controlled Cryatal Oscillator	
OCXO 2525A(B)	Features ◆ RoHS Compliant ◆ HCMOS/TTL ◆ Sine Wave compatible	

Electrical Specifications

Item		Specifications		
Nominal Frequency Range		200KHz to 180.0MHz		
Frequency Accuracy		±0.1ppm（Center control voltage）		
Frequency Stability vs. Temperature		See Table A		
Output and Load Characteristics	Output Waveform	Frequency Range	Out Characteristics	
	Clipping Sine Wave (or Sine Wave)	8.000M~30.000MHz Fund 10.0M~180.0MHz Overtone	Load:10KΩ//10PF(50Ω) Out Level:>1Vp-p(2dBm)	
	TTL	8.000M~30.000MHz Fund 10.0M~180.0MHz Overtone	Load:Max.10Low Power Consumption TTL gates Low Level: <0.4V High Level: >2.4V Symmetry at 1/2 VDC: 45/55% typical Rise & Fall Time: <6ns	
	HCMOS	200K~30.000MHz Fund 10.0M~180.0MHz Overtone	Load:Max.10Low Power Consumption TTL gates Low Level: <0.5V High Level: >4.5V Symmetry at 1/2 VDC: 45/55% typical Rise & Fall Time: <6ns	
Storage Temperature		-40℃ to +100℃		
Supply Voltage		3.3V±10%	5.0V±10%	12V±10%
Frequency Stability vs. Load		±0.002ppm (Load change±10%)		
Frequency Stability vs. Voltage		±0.002ppm (Voltage change±5%)		
Supply Consumption		3.6W(Max) when warm-up		
		1.2W(Max) when static		
Warm-up Time		±0.1ppm <3 minutes(AT)		
		±0.03ppm <3 minutes(SC)		
Adjustable Frequency Range		±5ppm (AT)		
		±1ppm (SC)		
Contor Voltage Range		0 ~ 5V typical		
Linilarity		<±10%		
Slope		Positive		
Phase Noise(10MHz)		1Hz: -80dBc/Hz	10Hz: -110dBc/Hz	100Hz: -135dBc/Hz
		1KHz: -145dBc/Hz	10KHz: -150dBc/Hz	
Aging		±0.5ppm first year/±3ppm 10 year (AT)		
		±0.1ppm first year/±0.5ppm 10 year (SC)		

Crystal Oscillator Series

OCXO 2525A(B)

Stability vs. Temperature (Table A)



◆ Standard		7	5	0	8	9	Remarks
◇ Please specify		±0.01ppm	±0.05ppm	±0.1ppm	±0.2ppm	±0.5ppm	
C	0°C to +50°C	◆	◇	◇	◇	◇	
D	-10°C to +60°C	◆	◇	◇	◇	◇	
E	0°C to +70°C	◇	◆	◇	◇	◇	
F	-20°C to +70°C		◇	◆	◇	◇	Standard
G	-30°C to +70°C		◇	◆	◇	◇	
H	-40°C to +70°C		◇	◆	◇	◇	

Ordering Information

OC	Type	Pin	XX.XXXX XXX.XXX	M	Output Waveform	Supply Voltage	Stability Vs.Temp.	Operating Temp.	Symmetry At 1/2 V _{DC}	Option
OC:OCXO	25A 25B	C: 5Pins	Center frequency 0.2 to 180.0MHz	M: MHz	S: Sine Wave T: TTL H: HCMOS	A: 3.3V B: 5.0V C: 12V	See Table A	See Table A	1: 45/55% 2: 40/60%	F: Lead Free T: T&R Blank: Bulk

Example: OC25AC10.000MHB0F1B (OCXO, 25.4*25.4*15mm, 5Pin, 10.000MHz, HCMOS, 5.0V, +/-0.1ppm, -20 to +70deg. 45/55%, Bulk)

Dimensions

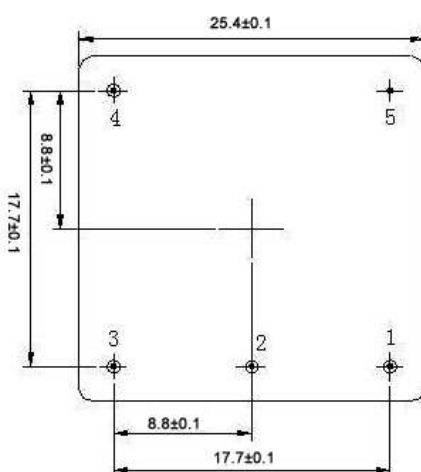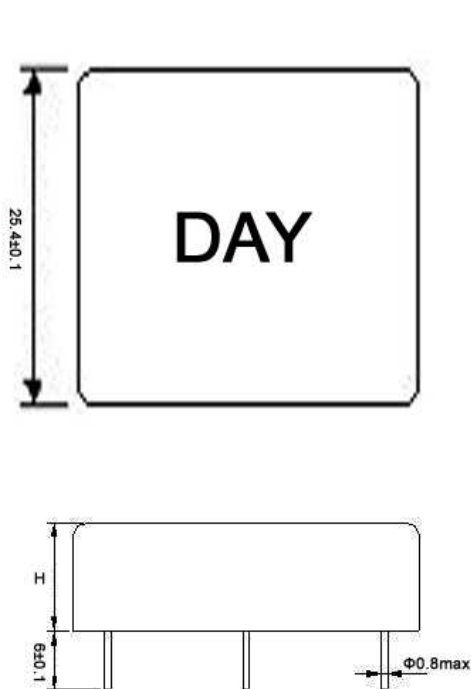

Pin	FUNCTION
#1	OUTPUT
#2	GND
#3	Contiol Voltage/NC
#4	Reference Voltage/NC
#5	Power Supply

Type	H
25A	15Max
25B	12.5Max

Unit:mm